

assuredcommunications™

RF-3045B REMOTE CONTROL-AUDIO/KEYLINE



The RF-3045B Remote Control provides remote transmitterkeying, audio modulation, and reception of received audio signals. Intercom (order wire) with ring-down signaling is also provided between the local and remote operators. The RF-3045B permits two-wire remote audio control of most HF and VHF tactical transceivers up to a distance of 5 km (3.1 miles).

Visual and audio signals alert the operators. When an operator is not immediately available, the call light remains on until the handset push-to-talk button is depressed.

A single BA-5590, BB-390, or BB-590 battery supplies power, while a built-in amplifier and speaker provide three watts of local and remote locations.



General

Remote Audio Control Functions Transmitter keying

Receiver audio

Intercom (order wire) Ring down signaling Call light/tone Volume control Speaker ON/OFF

3-Watt audio 2-wire circuit test

Low battery voltage level check

Control Distance Up to 5 km (3.1 miles)

Power Supply 12 VDC, from BA-5590, BB-390, BB-590 battery (not included)

Temperature Range -40° to +70° C
Shock/Vibration) MIL-STD-810B
Immersion 3 ft. of water

Humidity MIL-STD-810B

Size 3.25H x 8.625W x 10.2D in 8.125H x 21.56W x 25.7D cm


Weight Single unit with handset and w/o battery: 4.25 lb (1.9 kg)

Consists of One RF-3045B Remote Control Unit with battery box, handset,

interconnecting cable to radio, carrying bag, instruction card, and

instruction manual

Typical RF-3045B Applications

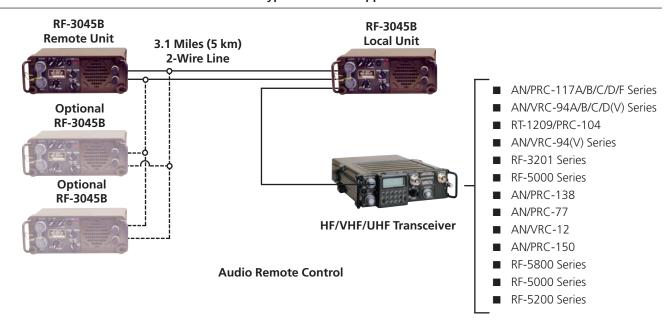

FALCON is a registered trademark of Harris Corporation. Specifications are subject to change without notice.

